


LEYCO[®] - TP SH

**SELF-DRYING SHAMPOO WITH
INTENSIVE LATHER**

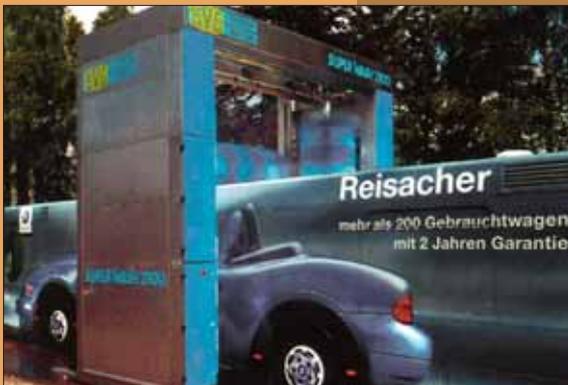

- **Swiftly and efficiently removes dirt, oil and grease**
- **Does not harm the car paint**
- **Also serves as a „lubricant“ between the brushes and the car paint**
- **The brushes are self-cleaned while the car is being washed**

LEYCO®-TP SH is a self-drying shampoo with intensive lather. It is used for trucks, buses and other heavy vehicles. Environmental dirt, oil, grease and other dirt picked up on roads is removed effectively, expeditiously and without any damage to the paint. The washing procedure is extremely "mild". While the vehicle is being washed, the brushes are simultaneously self-cleaning. The product has a refreshing perfume.

LEYCO®-TP SH

Product-No. 20.535

SHAMPOO WITH INTENSIVE LATHER

DESCRIPTION

May be used in every car wash which uses shampoo. It may also be applied manually.

At airports it is used for cleaning of ground equipment, buses and vehicles used on the runway.

ADVANTAGES

- Swiftly and efficiently removes dirt, oil and grease
- Does not harm the car paint
- Also serves as a „lubricant“ between the brushes and the car paint
- The brushes are self-cleaned while the car is being washed

TECHNICAL INFORMATION

Density (20°C): ~ 1,04 kg/ l (1 l = 1,04 kg)

pH Value: ~ 10

USE

In carwash plants it is used undiluted. If the plant contains a dosing pump, the product is added to water in the course of washing. The pump should be adjusted to use approximately 30 – 60 ml of the product for one wash.

When washing manually, you may dilute the product in various proportions, depending on the dirtiness of the vehicle. Maximum mixing ratio is 1 : 100.

If applied to vertical surfaces, the product must be applied from the bottom upwards, in order to avoid any `straps` which might remain after washing. After you have shortly applied the product (max. 5 min.), wash the surface with a strong water jet or a high-pressure device.

Freezing does effect the quality of the product.

PRECAUTIONS

Water pollution class:

WGK 2 = heavy pollutant (producer's estimation)

WGK 1 = light pollutant (producer's estimation)

Easily dissolvable in the sewerage system if used in prescribed concentration.

REMARK

Whilst information and/or specification contained herein is to the best of our knowledge true and accurate, and is based on many years experience, we cannot accept any liability either directly or indirectly arising from the use of our products, whether or not in accordance with any advice, specification or recommendation given by us, as we have no direct or continuous control over how or where our products are applied.

LEYDE-PRODUCTS are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale.

09.01.04

LEYCO CHEMISCHE LEYDE GmbH, Industriestr. 155, D - 50999 Cologne,

Tel.: +49 2236 - 9 66 00 0, Fax: +49 2236 - 9 66 00 11,

email: leycochem@leyde.com, internet: www.leyde.com