

LEYCO® -PLAST SM



Seamless applied by
brush or spray



Cold applied




Resistant to high
temperature and
sparks



Elastic at high and
low temperature


Highly elastic, self-adhesive, seamless waterproofing

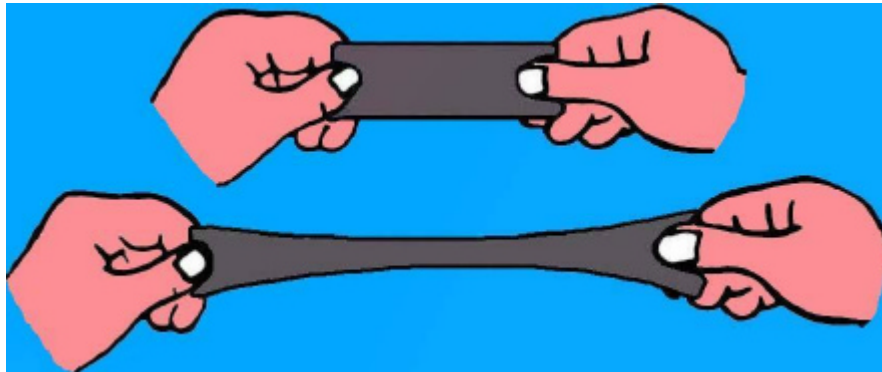


Resistant to
UV-radiation and
aggressive pollution



Resistant to
chemicals



Very good crack-
bridging property



Root resistant, which
is important for under-
ground application